BARK & BRANCH LANDSCAPE · PLANTING EXTRAS

Tree Planting, Done Right

How we set a specimen tree, what goes into the ground with it, and how we protect your investment after we leave.

(657) 525-9737 · CA Lic. #1119893 · Licensed & Insured



What separates a planted tree from a thriving one

	Typical nursery install	Bark & Branch Standard	+ Planting Extras
Setting the tree	Planted high on a mound, dirt water well	Set on a mound with a water well	Hole cut, plus a tree inspection drain
Backfill	Native soil	Site soil, watered in	Nutrient-rich soil backfill
Feeding	Basic 6-24-24 starter	Agriform tablets, Gro-Power Plus, Moon Juice for transplant shock	Same, in a nutrient-rich root zone
Excess soil	Left on site	Spread around planters or left on site	Exported off site
After planting	Nothing	Nothing	90-day arborist inspection and yearly oversight

From nursery to garden



Delivered. The box is inspected curbside before it moves.



Lifted. Crane set, so nothing is dragged across your hardscape.



Set. Placed at grade, faced to its best side, location confirmed with you.

Drainage and soil preparation



Cutting the hole. Dug to the box, not mounded on top.



Tree inspection drain. A pipe at the root ball lets us check and pull standing water.



Gypsum. Opens up tight clay so water can move through.



New backfill. Nutrient-rich soil in, spoil hauled out.

What goes into the nutrient-rich root zone



Planting amendment

Slow feed for years, not one season



Mycorrhizae

Living fungi that extend root reach



Humic acid

Helps roots take up what's in the soil




Azomite

Trace minerals for color and vigor



Fertilizer

Balanced feed for new root growth

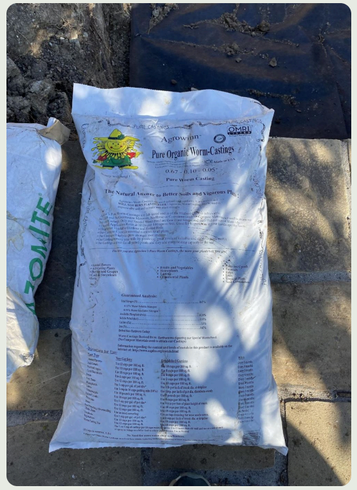

Root-zone feed

Feeds the new root zone

A typical install uses a basic 6-24-24 starter. We build the soil the tree will live in.

Soil export and backfill by tree size

Soil export $265 per yard · Nutrient-rich backfill $380 per yard, export required

Container	Export yd	Backfill yd	Export	Backfill
5 gal / 15 gal	0.25	0.25	$66	$95
24" box	0.75	0.50	$199	$190
30" box	1.00	0.75	$265	$285
36" box	1.50	1.00	$398	$380
48" box	3.25	1.75	$861	$665
60" box	5.75	3.25	$1,524	$1,235

Typical quantities. Actual yards vary with soil type and site conditions.





Protection at planting

Pest barrier

A borate ring around the trunk keeps ants and boring insects off a tree stressed from the move.

Watering basin

A shaped basin holds water over the root ball, where a new tree actually drinks.

AFTER THE CRANE LEAVES

Protect Your Investment

A specimen tree is a major purchase. The first twelve months decide whether it pays off for the next twenty years.

Why new trees struggle in year one

Standing water

Clay holds water around the root ball until the roots rot.

We: install an inspection drain so we can check and pull it.

Water stress

The box root ball dries out long before the soil around it.

We: check moisture and sprinkler coverage at every visit.

Pests and disease

Borers, ants and fungus go after stressed trees first.

We: send an arborist at 90 days for a written report.

Problems caught late

Small issues become big ones when nobody is looking.

We: inspect quarterly for the first year.

Your tree's first year with us

90-day arborist inspection, then quarterly oversight visits.

Planting day

Tree set, watered in, baseline photos taken

Day 90

Arborist inspection with a full written report on pests and disease

Month 6

Oversight visit: moisture, drain, sprinkler coverage, tree health

Month 9

Oversight visit: same checks, issues flagged with photos

Month 12

Year-end visit and a summary of how the tree established

Arborist inspection at 90 days: $450 · Yearly tree oversight, quarterly inspections: $1,500 per year

Also available, quoted on request

Not part of the planting price, but often worth doing at the same time.

Irrigation to the tree

Bubblers on their own valve, so the tree waters on its schedule, not the lawn's.

Staking and anchoring

Holds the tree plumb through Santa Ana winds until the roots take hold.

Root barrier

Steers roots down and away from paving, walls and pool shells.

Choose your level of care

Standard Planting

Your quoted price

- Set on a mound with a water well
- Site soil backfill, watered in
- Agriform tablets and Gro-Power Plus
- Moon Juice for transplant shock
- Box lumber hauled off, cleanup

+ Planting Extras

Added to your quote

- Tree inspection drain: $390 per tree
- Soil export: $265 per yard
- Nutrient-rich backfill: $380 per yard (export required)

RECOMMENDED

+ Tree Protection

- Everything in Planting Extras
- Arborist inspection at 90 days: $450
- Yearly tree oversight, quarterly inspections: $1,500 per year

Next steps

1. Pick your level: Standard, Extras, or Extras with Tree Protection.

2. Approve with a deposit of 10% or $1,000, whichever is less. That reserves the crane date.

3. We confirm the exact location with you on site before we dig.

Bark & Branch Landscape

1253 E Imperial Hwy, Placentia, CA 92870
(657) 525-9737 · barkandbranchlandscape.com
CA Lic. #1119893 · Licensed & Insured

